

2021

Design of a 10 MeV Beamline at the Upgraded Injector Test Facility for e-Beam Irradiation

Xi Li

Old Dominion University, xli009@odu.edu

Helmut Baumgart

Old Dominion University, hbaumgar@odu.edu

Gianluigi Ciovati

Old Dominion University, gciovati@odu.edu

F.E. Hannon

S. Wang

Follow this and additional works at: https://digitalcommons.odu.edu/ece_fac_pubs



Part of the [Biomedical Commons](#), and the [Plasma and Beam Physics Commons](#)

Original Publication Citation

Li, X., Baumgart, H., Ciovati, G., Hannon, F. E., & Wang, S. (2021). *Design of a 10 MeV beamline at the upgraded injector test facility for e-beam irradiation*. 12th International Particle Accelerator Conference, May 24-28th, 2021, Campinas, Brazil. <http://dx.doi.org/10.18429/JACoW-IPAC2021-WEPA254>

This Conference Paper is brought to you for free and open access by the Electrical & Computer Engineering at ODU Digital Commons. It has been accepted for inclusion in Electrical & Computer Engineering Faculty Publications by an authorized administrator of ODU Digital Commons. For more information, please contact digitalcommons@odu.edu.

DESIGN OF A 10 MeV BEAMLINE AT THE UPGRADED INJECTOR TEST FACILITY FOR e-BEAM IRRADIATION*

X. Li^{1,2†}, F. Hannon, H. Baumgart^{1,2}, G. Ciovati, S. Wang

Thomas Jefferson National Accelerator Facility, Newport News, Virginia, USA

¹also at Department of Electrical and Computer Engineering,
Old Dominion University, Norfolk, VA, USA

²also at Applied Research Center at Thomas Jefferson National Accelerator Facility,
Newport News, VA, USA

Abstract

Electron beam irradiation with energy less than or close to 10 MeV is suitable and sustainable for the wastewater treatment. The Upgraded Injector Test Facility (UITF) at Jefferson lab is a CW superconducting linear accelerator capable of providing an electron beam of energy up to 10 MeV. To investigate degradation of the organic compound pollutants, a wastewater treatment beamline at UITF has been designed by using the code GPT (General Particle Tracer). The electron beam is assumed to have 8 MeV electron energy and the transverse radius of sigma around 0.8 to 0.9 cm. It has been found that the rms (by second central moment) energy spread induced by the accelerating cavity is less than 74.5 keV in the simulations. The space charge effect doesn't affect the beam quality for 100 nA beam current.

INTRODUCTION

With the increasing industrialization affecting the quality of human life, more and more varieties of harmful industrial organic compounds are found in the wastewater. These toxic organic compounds like 1,4 dioxane are extremely difficult to be removed by existing conventional treatment methods, which challenges the wastewater treatment before it is discharged to the surroundings or reused for the replenishment of ground water [1-3]. EB (electron beam) irradiation has been proven to be a sustainable approach for the wastewater treatment, since it is capable of removing efficiently and effectively the most harmful pollutants including the toxic chemicals, metal, bacteria, viruses, pathogens, and especially the organic compounds from industrial manufacturing [4, 5].

Since the 1980s when EB irradiation was widely applied in the commercial and industrial fields all over the world, numerous promising research efforts have been reported on wastewater EB irradiation. First of all, EB irradiation is versatile for treating a wide range of pollutants in wastewater. The target chemicals are in an aqueous wastewater, so the energetic electrons, typically between 1 MeV to 10 MeV, interact with the water molecules to produce mainly the reducers, aqueous electron e^-_{aq} , hydrogen $\cdot H$, and oxidant, hydroxyl $\cdot OH$, which then contribute to the removal of the target materials through chemical redox reactions [6]. Theoretically EB irradiation is able to

remove any chemicals which can be degraded by a reducer or an oxidant. Various kinds of waste chemicals and microorganisms are treated at the EBRF (Electron Beam Research Facility) of Miami [2, 7] and can be removed at a high percentage with the dose around 8 kGy. Secondly, the EB irradiation is quite safe and friendly to the environment due to the absence of the extra chemicals and the low radiation effects of the easily stopped electrons. Finally, EB irradiation is able to treat the wastewater at a large-scale. The wastewater is usually treated as a sheet flow in front of the electron beam due to the limited penetration depth of the electrons in the liquid water, so the wastewater can be treated based on the operation status of the electron accelerator. Therefore, with its non-selectivity, environment friendly and large-scale treatment, EB irradiation can be considered a prospective approach for the modern wastewater treatment.

SWIFT (Sustainable Water Initiative for Tomorrow) is a local program conducted by HRSD (Hampton roads sanitation district) to slow down and ultimately restore the land subsidence of the Chesapeake Bay with the replenishment of the treated wastewater to the Potomac aquifer [8, 9], where the wastewater is treated to reach drinking water standard level before recycling it to replenish groundwater lost by excessive use. The remediation of the pollutants is usually affected by a lot of factors, such as the electron beam parameters, the pH of the wastewater, the target compounds, and the degradation pathways of different chemicals are also different. For the purpose of this research project 1,4-dioxane, a common toxic organic compound in the wastewater, has been designated as the initial target chemical. Instead of using flow water, the sample wastewater is going to be irradiated in a special designed sample container to investigate the degradation mechanism of harmful organic pollutants.

The electron beam is utilized with the UITF in Jefferson lab. The maximum electron energy of UITF can reach up to 10 MeV, we have investigated research scenarios under several different electron beam energies. As an initial study, 8 MeV electron beam is being used as the first step.

Based on UITF, this paper describes the design of the wastewater treatment beamline, which consists of the photocathode electron gun, transportation magnets, accelerating SRF (super-conducting radio-frequency) cavities and defocusing magnets and the set-up is 25 m long. With the GPT (general particle tracer) simulations [10], we will state designed beam size, the initial electron beam distribution,

* Work supported by LDRD program in Jefferson lab.

† xli009@odu.edu, xiliodu@jlab.org

the RF gradients and phases scanning, the blowing transportation. Finally, the space charge effects on the beamline are investigated from beam currents ranging from 100 nA to 100 μ A.

BEAMLINE SETUP

With the 10 MeV maximum electron energy of UITSF, the wastewater sample container is designed with 4 cm depth [11]. Taking the 1,4-dioxane concentration detectable volume limit, the volume is around 75 mL and its corresponding cross section diameter is 2.43 cm. Therefore, the transverse radius of the beam should not be less than 2.43 cm and should ideally have a uniform distribution. The σ_{radius} (standard deviation of the beam) range is designed from 0.8 to 0.9 cm.

Figure 1 is the schematic of the wastewater treatment beamline.




Figure 1: Schematic of the wastewater treatment beamline.

The laser pulses with 780 nm wavelength are getting absorbed by the photocathode inside the electron gun cavity causing the gun to emit the electrons, which are then accelerated to 200 keV energy by the electric field in the DC gun and transported through the solenoids, chopper cavity and buncher cavity before reaching the SRF cavities of 1.5 GHz. There are two cavities inside the SRF cryomodule, the first one is a 2-cell cavity to capture the electron bunches and to accelerate the bunches to 0.533 MeV, the following 7-cell cavity is to accelerate the electron beam to 8 MeV.

However, the magnetic strengths of the following four quadrupoles are not sufficient to expand the electron beam to a big round beam size within the existing beamline distance less than 10 m. Therefore, they are designed to transport the electron beam to a round one and to achieve the big beam size as much as they can by adjusting the focusing point. Then a solenoid, with peak on axis magnetic strength of 0.23 T, is applied to over-focus the beam to be as small as possible it can to achieve a higher beam divergence after the focusing point, which is beneficial to expand the electron beam within the existing beamline distance. Ultimately the electron beam is obtained with a transverse maximum radius of up to 25 mm when it reaches to the sample container.

INITIAL DISTRIBUTION

For the initial space distribution in simulation, the beam is assumed to have a Gaussian distribution, following the profile of the laser. The transverse radius is set with the standard deviation of 0.4 mm according to the laser spot size, as shown in Fig. 2. The whole radius is set with $3\text{-}\sigma$ cut-off. The longitudinal standard deviation is 15 ps according to the 30 ~ 40 ps FWHM (full width at the half

magnitude) of the laser. The corresponding bunch length is $4\text{-}\sigma$ cut-off for the simulation.

The bunch charge is calculated by 100 nA with 750 MHz CW (continuous wave) mode frequency, that is $1.333\text{e-}16$ C. The applied macro particle number is 5000 in GPT simulation.

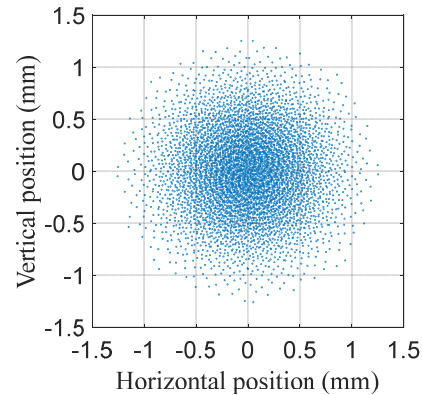


Figure 2: Initial transverse space distribution.

In addition, the electrons are assumed to be uniform and simultaneously emitted from the GaAs photocathode surface, so the initial momentum distribution is assumed to be uniform at all the three directions, it is a uniform half-sphere in the momentum space. Experimentally the MTE (mean thermal energy) of the emitted electrons is around 0.04 eV for the 780 nm laser wavelength [12], the kinetic energy can be then calculated by a factor of $3/2$.

SRF ACCELERATING

The electron beam gained 200 keV energy after the electron gun. Then the electron beam is focused to an appropriate small and shorter electron bunch before it enters the 2-cell cavity of the SRF cryomodule with 1.5 GHz RF frequency.

The electric fields and phases of the two SRF cavities are optimized by setting the phase at the crest energy gain, the corresponding on axis peak electric fields are 4.363 MV/m and 18.63 MV/m respectively. Figure 3 shows the longitudinal phase distribution after the acceleration, which shows the lowest energy spread case of the crest energy gain.

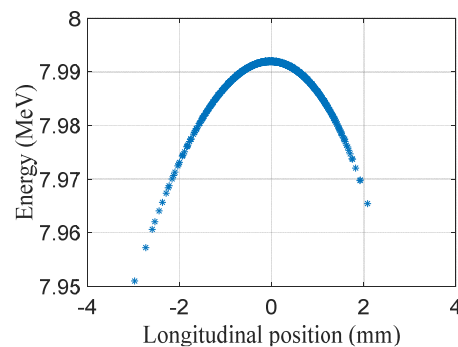


Figure 3: Longitudinal phase distribution after the accelerating.

Content from this work may be used under the terms of the CC BY 3.0 licence (© 2021). Any distribution of this work must maintain attribution to the author(s), title of the work, publisher, and DOI

We should note that the energy spread will increase when the phase is not designed at the crest of the electric field waveforms, the highest simulated σ_E is around 75 keV.

DEFOCUSING SOLENOID

To get more accurate simulations, the applied 2-D electric field map of the solenoid was calculated by POISSON with comparing to the 1-D experimental on axis magnetic field map.

The quadrupoles are at the beamline position from 14 m to 17 m, they are set to get a round beam downstream temporally. Then the position of the solenoid is optimized by fixing its peak on axis strength as 0.22 T, the optimum position is at 20.25 m to get the maximum beam size at the very end. Figure 4 shows one solution of the transverse electron beam statistics along the beamline.

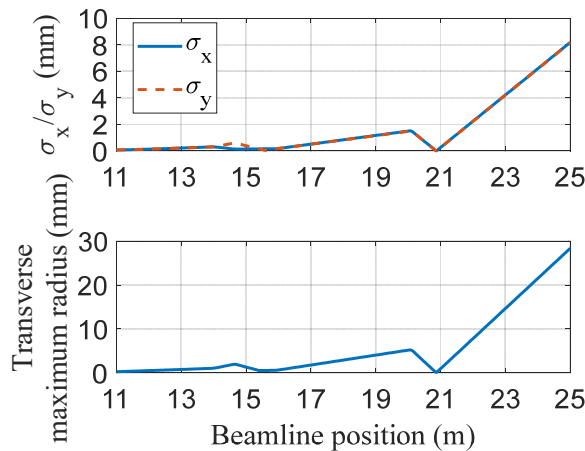


Figure 4: Beamline envelope through the quadrupoles and defocusing solenoid.

It is obvious that the beam is round after the quadrupoles and the solenoid expands the beam with the same extent on both horizontal and vertical directions. It also verifies that the beam divergency is increased as it supposed to after the defocusing solenoid compared to that between the quadrupoles and the defocusing solenoid. The transverse maximum radius at the end of the beamline (at 25 m) is close to 30 mm with the statistic σ_x around 8.3 mm, which has accomplished the design.

SPACE CHARGE EFFECTS

The desirable beam has been achieved through the simulation, and it has been shown that there is not much influence on the electron beam under the 100 nA beam current.

While considering the space charge effect with higher bunch charges is useful for the test phase in reality, we have carried out the simulations for the case of 1000 times higher beam current. Some of these modelled cases under the highest energy spread 75 keV beamline are shown in Fig. 5.

It is obvious that the beam transverse size increases with the increasing bunch charge. The reason is from the repulsive force among the denser electrons of the electron

bunch. The higher energy spread leads to a bigger beam size at the entrance of the defocusing solenoid and then to a bigger beam size at the end of the beamline. In fact, the beam size can be adjusted by decreasing the magnetic strength of the defocusing solenoid, which is feasible in reality. Therefore, the space charge effect doesn't have adverse effects on the beam transportation.

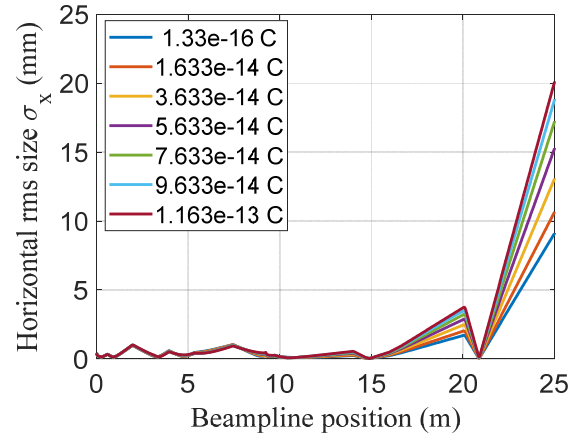


Figure 5: Beam envelope under higher bunch charges.

CONCLUSIONS AND OUTLOOK

With the ability to remediate kinds of most harmful organic compounds, bacteria, virials and other pollutants in the wastewater, EB irradiation is versatile and prospective for the wastewater treatment. As an initial study to solve the local wastewater treatment challenge, we have designed the UITF wastewater beamline for degrading 1,4-dioxane.

Through the GPT simulations, the electron beam is designed and achieved successfully with 8 MeV electron energy and 0.8 cm to 0.9 cm rms transverse radius, which is not changed by the space charge effect with 100 nA beam current considered. The beamline consists of the photocathode electron gun, magnets, SRF accelerating, quadrupoles and a high magnetic strength defocusing solenoid which is applied to blow up the electron beam with a high beam divergency by over focusing the beam. The advantages of the defocusing solenoid utilization include achieving a big beam size within the certain beamline distance, getting a transverse round beam. It is also convenient to decrease the magnetic strength of the solenoid to adjust the beam envelop changes resulted from the space charge effect where the higher bunch charges are considered.

For next stage and further study, the beamline will be installed, commissioned and run for the wastewater sample irradiation.

REFERENCES

[1] M. Trojanowicz *et al.*, "Application of ionizing radiation in decomposition of perfluorooctanoate (PFOA) in waters", *Chemical Engineering Journal*, vol. 357, pp. 698-714, 2019. doi:10.1016/j.cej.2018.09.065

- [2] C. N. Kurucz, T. D. Waite, W. J. Cooper, and M. J. Nickelsen, “High Energy Electron Beam Irradiation of Water, Wastewater and Sludge”, in *Advances in Nuclear Science and Technology*, J. Lewins and M. Becker, Eds. Boston, MA, USA: Springer, pp. 1–43, 1991.
- [3] L. Wang, B. Batchelor, S. D. Pillai, and V. S. V. Botlaguduru, “Electron beam treatment for potable water reuse: Removal of bromate and perfluorooctanoic acid”, *Chemical Engineering Journal*, vol. 302, pp. 58–68, 2016.
doi:10.1016/j.cej.2016.05.034
- [4] L. V. T. Truc, L. D. Can, and T. L. Luu, “Electron Beam as an Effective Wastewater Treatment Technology in Lab-Scale Application”, *Journal of Hazardous, Toxic, and Radioactive Waste*, vol. 25, no. 2, p. 03120003, 2021.
doi:10.1061/(asce)hz.2153-5515.0000584
- [5] M. Emami-Meibodi *et al.*, “An experimental investigation of wastewater treatment using electron beam irradiation”, *Radiation Physics and Chemistry*, vol. 125, pp. 82–87, 2016.
- [6] M. Siwek and T. Edgecock, “Application of electron beam water radiolysis for sewage sludge treatment - a review”, *Environmental Science and Pollution Research*, vol. 27, no. 34, pp. 42424–42448, Sep. 2020.
doi:10.1007/s11356-020-10643-0
- [7] C. N. Kurucz, T. D. Waite, and W. J. Cooper, “The Miami Electron Beam Research Facility: a large scale wastewater treatment application”, *Radiation Physics and Chemistry*, vol. 45, no. 2, pp. 299–308, 1995.
doi:10.1016/0969-806x(94)00075-1
- [8] D. Strain, “Come High Water Sea Level Rise and Chesapeake Bay - THE RISING: Why Sea Level Is Increasing”, *Chesapeake Quarterly*, vol. 13, no. 2 & 3, Oct. 2014.
www.chesapeakequarterly.net/sealevel/main2/.
- [9] Sustainable Water Initiative for Tomorrow (SWIFT),
<https://www.hrsd.com/swift/about>
- [10] Pulsar Physics, Pulsar Physics,
<http://www.pulsar.nl/gpt/>.
- [11] R. B. Miller, *Electronic Irradiation of Foods: An Introduction to the Technology*. Albuquerque, NM, USA: Springer Science Business Media, Inc., 2005.
- [12] F. Hannon, “A high Average-current Electron Source for the Jefferson laboratory free electron laser”, Ph.D. thesis, University of Lancaster, Lancaster, UK, 2008.